

# primus

## High Spin Industrial Washer Extractors FS 23, FS 23 PRO



FS 23 COIN



FS 23 PRO

### FEATURES

- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Graphitronic® - new graphic display with almost unlimited possibilities as:
  - Communication interface enabling remote service
  - Multilingual microprocessor
  - Freely programmable
- Large door opening (Ø42 cm) for easy loading and unloading
- Large drain valve (Ø76 mm)
- Easy access to all parts
- Liquid soap connections
- Frequency controlled motor
- Patented soap hopper and drain valve (Liqui-Mix® system)
- PowerWash® perforated lifting ribs: more mechanical action, lower water consumption
- Possibility to connect up to 6 inlets of liquid detergents - EasySoap®

### OPTIONS

- SoftWash® version (wet cleaning)
- Liquid soap pumps
- Trace-Tech® traceability software and networking system
- Patented soap dispenser with four removable compartments on the front (FS 23 PRO)
- Coin operated timer with Easy Control microprocessor (FS 23)

TRACE-TECH®

liqui-mix®


easySOAP®

Graphitronic®

POWERWASH®

TYPE		FS 23	FS 23 PRO
<b>CAPACITY</b>			
Drum volume	l	220	220
Capacity	kg	22	22
Drum dimensions	mm	Ø750x498	Ø750x498
<b>MOTOR</b>			
Frequency controlled		standard	standard
<b>DRUM SPEED</b>			
Wash speed	rpm	42	42
Spin speed	rpm	860	860
G-factor	rpm	310	310
<b>PROGRAMMER</b>			
Graphitronic® Full control microprocessor		standard	standard
Easy Control microprocessor		standard on coin version	-
<b>CABINET</b>			
Stainless steel AISI 304		standard	standard
<b>SAFETY FIXING</b>			
		4xM10	4xM10
<b>HEATING</b>			
100% hot water	°C	90	90
	°F	194	194
100% electrical	kW	18	18
Steam high pressure	bar	3-8	3-8
<b>CONNECTION</b>			
Electrical		1x220-240V 50/60Hz 3x220-240V 50/60Hz 3x380-415V 50/60Hz 3x380-415V+N 50/60Hz 3x440-480V 50/60Hz	1x220-240V 50/60Hz 3x220-240V 50/60Hz 3x380-415V 50/60Hz 3x380-415V+N 50/60Hz 3x440-480V 50/60Hz
Water inlet	inch	3/4"	3/4"
Steam inlet	inch	1/2"	1/2"
<b>DIMENSIONS</b>			
HxWxD	mm	1435x900x1115	1625x900x1150
<b>TRANSPORT DATA</b>			
Gross weight	kg	690	720
Net weight	kg	650	670
Packing volume	m <sup>3</sup>	1,9	2,45
Packing dimension HxWxD	mm	1620x975x1200	1920x1010x1265

Standard = Standard version

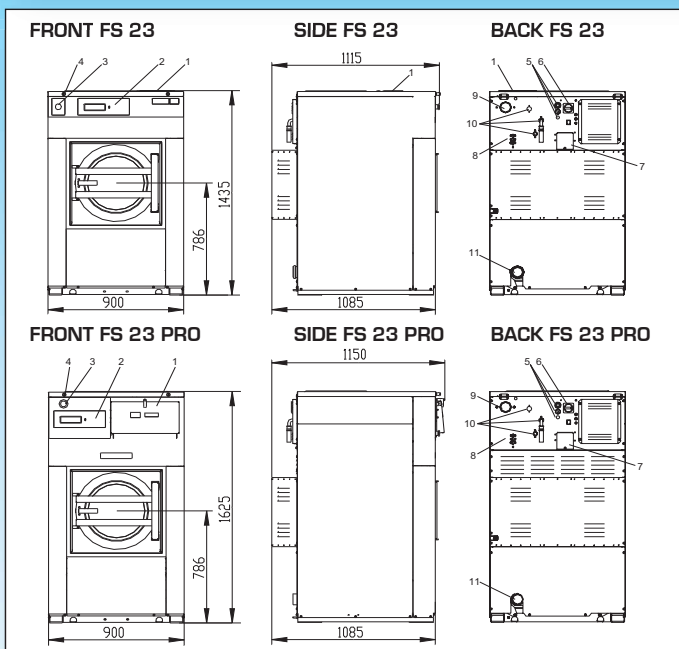

1. Soap hopper
2. Keyboard
3. Emergency stop
4. Key switch
5. Electrical connection
6. Main Switch
7. Electrical connection to liquid soap
8. Liquid soap pump connection
9. Air vent
10. Water connection
11. Drain valve

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

primus

Quality **without**  
compromise

